A simple multi display via USB connnection [software attached] Sign as VGA Dark Green PLUS



Starter Kit

Supports wide-screen! 1680×1050(WSXGA+) 1440×900(WXGA+)

UXGA (1600 × 1200) supported!

Up to 4 establishment enabled!!

■Package Contents

Driver CD-ROM x1 MMPT2 CD-ROM x1 Instruction Manual x1

Model No.: USB20SVGA-DG-PLUS

JAN: 4571139328588



□ 😜

Dedicated













■What is multi display?

Enables to display multiple monitors compatible with Windows Vista, XP and 2000 with only 1 PC without requiring an additional vidéo card establishment. With this, a multi display can be performed

■Work solution enabled in multi display

In multi display environment, a work efficiency can be improved dramatically by using 2 displays with only 1 unit.

Moreover, a smooth presentation can be performed by using a clone desktop

■Online trading case example



online trading as various information shall

■Presentation case example



A smooth and smart presentation such as onsite presentation via laptop is enabled by using clone desktop feature

■Office case example

multi display



■For "More" simplified multi display

As being USB peripherals...

- Open/Close or establishment work is not required Consideration on video card compatibility issue is unneeded
- Multi display environment is enabled with laptops · Establishment up to 4 monitors available

Being only USB peripherals...

- Enables multi display with Windows Vista, XP and 2000 Supports "Multi Desktop" that extends display area

■ Enables additional establishment "up to 4 units"



By combining with different color models in order of your choice, establishment up to 4 monitors are nabled. A simultaneous use of "Multi Desktop" and "Clone Desktop" is also available.

*Note that concurrent use of the same color model is unavailable with 1 PC.


■Specification

Model No.	USB20SVGA-DG-PLUS	
Product	Sign as VGA Dark Green PLUS	
Compatible PC	PC with USB2.0	
Compatible OS	Windows Vista / XP / 2000(SP4)	
Connector Type	PC side: USB2.0	
	Monitor side: D-sub15Pin (Analog RGB)	
Display Color	16.77 million colors (MAX)	
Horizontal Freq.	60∼85Hz	
Dimension	Unit:50(W)×25(H)×115(D)mm	
	Cable Length: 440mm	
Weight	120g	
Current	500mA (MAX)	
Supply Voltage	5.0V (supplied from USB connector)	
Temperature	0∼40 degrees C	
Humidity	20~80% (Without condensation)	
Warranty Period	1 year from purchased date	
Certification	FCC, VCCI, CE, RoHS, WHQL	

■Compatible Resolution

4:3 Monitor (analog connection)		
Display Resolution	Display Color	
800×600 pixel	16 / 32 bit	
1024×768 pixel	16 / 32 bit	
1152×864 pixel	16 / 32 bit	
1280×960 pixel	16 / 32 bit	
1280×1024 pixel	16 / 32 bit	
1600×1200 pixel	16 bit	

Wide Monitor (analog connection)		
Display Resolution	Display Color	
1280×768 pixel	16 / 32 bit	
1280×800 pixel	16 / 32 bit	
1440×900 pixel	16 / 32 bit	
1680×1050 pixel	16 bit	

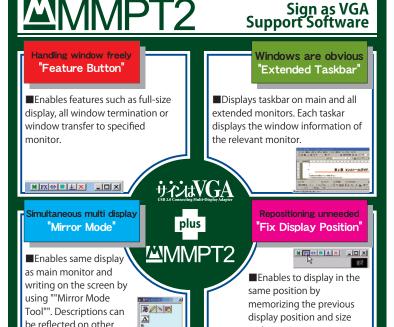

monitors in real time.

without requiring

repositioning setting.